



REFERENCE SK-SHOCK-AX-3DS-8G-SCM-OUT

PRODUCT VIDEO



USER GUIDE



QUICK START



DESCRIPTION

This wireless IOT Shock sensor starterkit includes everything you need to setup quickly your vibration monitoring application :

- Wireless Receiver/Gateway with LAN Output, IP67 casing (Ref: [BeanGateway® Outdoor](#))
- Wireless accelerometer dedicated to shock measurement with integrated data logger. [BeanDevice® 2.4GHz AX-3DS](#): $\pm 2/4/8g$
- 1 x Free software to collect and display in real-time data measurement (Ref: [BeanScape® 2.4GHZ LITE](#))
- AC/DC Power Adapter (US or EUR or UK plugs) for charging the battery or to be used constantly

MAIN FEATURES

- Wireless accelerometer dedicated to shock Scalable measurement range : $\pm 2g/\pm 4g/\pm 8g$
- SSD (Smart Shock Detection), wireless sensor can wakeup on shock detection (software configurable)
- Noise spectral density @ BW 10Hz: 218 $\mu g/\sqrt{Hz}$
- Time-synchronized data acquisition ($\pm 2.5ms$ of accuracy)
- Waterproof IP67 aluminum casing (Nema 6)
- Rechargeable Lithium-Polymer battery 2200 mAh providing a battery life up to 15 months
- Embedded data logger : up to 1 million data points (with events dating)
- Excellent radio link with a maximum range of 500 meters

WEBLINKS TO PRODUCTS

- Wireless shock sensor
- Wireless Receiver/Gateway
- Eco-friendly Monitoring Software

HOW IT WORKS ?

BeanScape® 2.4GHz
Wireless IOT Supervision Software

IOT Gateway | Outdoor Version




BeanDevice® 2.4GHz AX-3DS
Wireless IOT Shock Sensor

WirelessLink
2.4GHz

Ethernet LAN



DRAWING

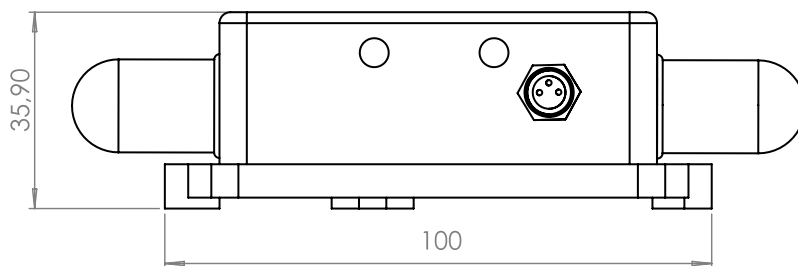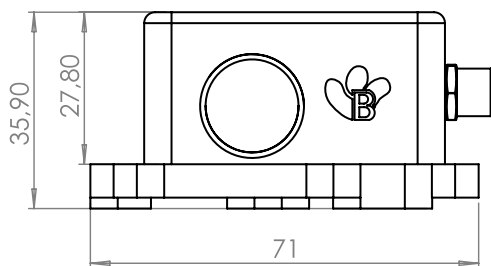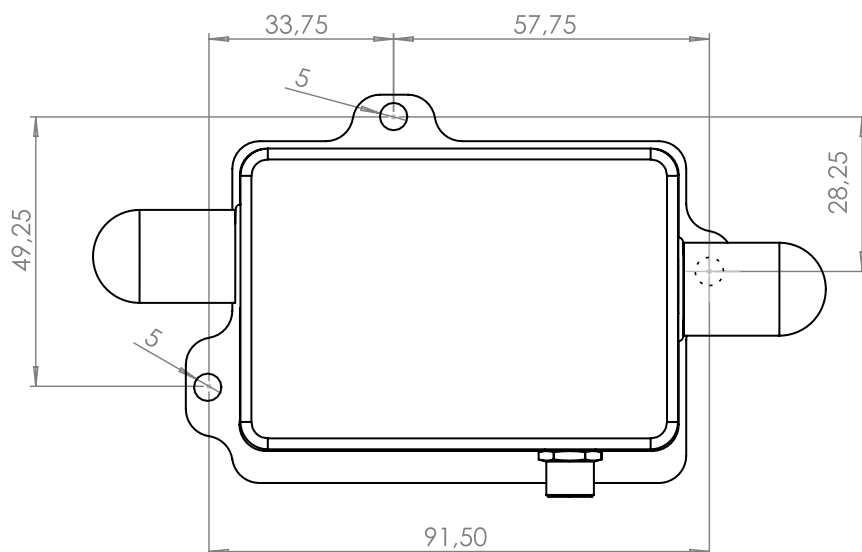

CONTACT US

Headquarter:

Buchholzer Straße 65, 13156
Berlin, Germany

Email:

info@beanair.com

Phone number:

+493066405051



www.facebook.com/BeanAir



www.beanair.com



www.youtube.com/user/BeanairSensors



www.twitter.com/beanair

